

# ENVIRONMENTAL PRODUCT DECLARATION

as per ISO 14025 and EN 15804+A2

Owner of the Declaration	EJOT SE & Co. KG
Publisher	Institut Bauen und Umwelt e.V. (IBU)
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Declaration number	EPD-EJO-20240113-CBA1-EN
Issue date	03.04.2024
Valid to	23.06.2028

**EJOT Multifix PSF+ / Sormat ITH-Pe**  
**EJOT SE & Co. KG**

[www.ibu-epd.com](http://www.ibu-epd.com) | <https://epd-online.com>



## General Information

### EJOT SE & Co. KG

#### Programme holder

IBU – Institut Bauen und Umwelt e.V.  
Hegelplatz 1  
10117 Berlin  
Germany

#### Declaration number

EPD-EJO-20240113-CBA1-EN

#### This declaration is based on the product category rules:

Reaction resin products, 01.08.2021  
(PCR checked and approved by the SVR)

#### Issue date

03.04.2024

#### Valid to

23.06.2028



Dipl.-Ing. Hans Peters  
(Chairman of Institut Bauen und Umwelt e.V.)



Florian Pronold  
(Managing Director Institut Bauen und Umwelt e.V.)

### EJOT Multifix PSF+ / Sormat ITH-Pe

#### Owner of the declaration

EJOT SE & Co. KG  
In der Stockwiese 35  
57334 Bad Laasphe  
Germany

#### Declared product / declared unit

The declared product is the two-component reaction resin mortar "EJOT Multifix PSF+ / Sormat ITH-Pe", manufactured by EJOT SE & Co. KG. The declared unit is based on 1 kg reaction resin product in the ratio at which the two components must be mixed before use. The packaging is also included in the calculation, since the product is sold by EJOT SE & Co. KG with its packaging. The declared unit is indicated in [kg].

#### Scope:

This document covers two-component reaction resin mortar "EJOT Multifix PSF+ / Sormat ITH-Pe". To prepare the life cycle assessment [LCA], specific data were collected from the EJOT SE & Co. KG manufacturing facility in Germany. The assessment is based on data from 2020 which correspond to the yearly average. The procedure by which the data are allocated to the declared unit is described in the "Allocation" section. The owner of the Declaration is liable for the underlying information and documentation, and IBU cannot be held liable with regard to any manufacturer information, LCA data or documentation.

The owner of the declaration shall be liable for the underlying information and evidence; the IBU shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

The EPD was created according to the specifications of EN 15804+A2. In the following, the standard will be simplified as *EN 15804*.

#### Verification

The standard EN 15804 serves as the core PCR	
Independent verification of the declaration and data according to ISO 14025:2011	
<input type="checkbox"/>	internally
<input checked="" type="checkbox"/>	externally



Angela Schindler,  
(Independent verifier)

## Product

### Product description/Product definition

The declared product EJOT Multifix PSF+ / Sormat ITH-Pe is a two-component reaction resin mortar based on polyester resin that is delivered in a two-component plastic cartridge or foil tube cartridge. The EJOT Multifix PSF+ / Sormat ITH-Pe product is applied through a static mixer using a manual, battery-operated or pneumatic gun. It was developed as a cost-effective alternative for securing threaded rods and internally threaded sleeves in approved applications. It can also be used safely and easily in perforated brick by using a perforated sleeve. EJOT Multifix PSF+ / Sormat ITH-Pe offers a good range of applications at environmental temperatures of up to 80 °C.

Marketing of the product in the EU/EFTA (except for Switzerland) is governed by Regulation (EU) No. 305/2011 (CPR). The product requires a Declaration of Performance subject to *ETA-21/0664 and ETA-22/0438 and the CE-marking*.

### Application

The declared product EJOT Multifix PSF+ / Sormat ITH-Pe is used to reliably secure threaded rods and internally threaded sleeves. Use in non-cracked concrete and solid and perforated brick is possible with industry standard anchor rods.

### Sample applications

Suitable for securing façades, canopies, wooden structures, metal structures, metal profiles, panels, railings, gratings, plumbing fixtures, pipes, cable trays etc.

### Technical Data

The following construction data are relevant for the declared product EJOT Multifix PSF+ / Sormat ITH-Pe as delivered:

### Construction Data

Name	Value	Unit
Density acc. to DIN 51757 for mixing the two components	1.7	g/ml
Compressive strength acc. to DIN EN 196 Part 1	88.1	N/mm <sup>2</sup>
Flexural strength acc. to DIN EN 196 Part 1	31.5	N/mm <sup>2</sup>

### Storage:

Store in a cool, dry and dark place; storage temperature: +5°C to +25°C

### Shelf life:

18 months in standard cartridge systems  
12 months in foil tube cartridge systems

### Gel and working time:

-5 °C 90 min.  
0 °C 45 min.  
+5 °C 25 min.  
+10 °C 20 min.  
+20 °C 6 min.  
+30 °C 4 min.  
+35 °C 2 min.

### Curing time in dry substrate:

-5 °C 360 min.  
0 °C 180 min.  
+5 °C 120 min.  
+10 °C 100 min.  
+20 °C 45 min.  
+30 °C 25 min.  
+35 °C 20 min.

For more information, please refer to the relevant technical data sheet.

Product performance values in accordance with the Declaration of Performance with regard to its principal characteristics according to *ETA-21/0664 and ETA 22/0438, European Technical Assessment EJOT SE & Co. KG Injection System EJOT Multifix Polyester / Sormat ITH Polyester*.

### Base materials/Ancillary materials

The declared product EJOT Multifix PSF+ / Sormat ITH-Pe is delivered as a two-component plastic cartridge and consists of a resin component and a curing agent component in a 10:1 volume ratio. The mixing ratio between the resin component and the curing agent component is set automatically as the product is pushed out of the cartridge. Curing begins immediately after the components are mixed.

1) "This product/article/at least one partial article contains substances in the ECHA candidate list of substances of very high concern (SVHC) (10 June 2022) above a concentration of 0.1% by mass: no."

2) "This product/article/at least one partial article contains other CMR substances in categories 1A or 1B which are not on the candidate list, exceeding 0.1 percentage by mass: no"

3) "Biocide products were added to this construction product or it has been treated with biocide products (this then concerns a treated product as defined by the (EU) Regulation on Biocidal Products No. 528/2012): no"

The product considered in this EPD contains individual components in the following ranges:

### Resin component:

Polyester resin: 30 to 40% by weight  
Mineral fillers: 50 to 70% by weight  
Other components: < 5% by weight

### Curing agent component:

Dibenzoyl peroxide: 10 to 15% by weight  
Mineral fillers: 40 to 60% by weight  
Other components: 10 to 35% by weight

### Reference service life

The declared product EJOT Multifix PSF+ / Sormat ITH-Pe may be exposed to a wide range of environmental conditions during the use phase. Its expected reference service life depends on the specific installation situation and on the product's resulting exposure. The main factors influencing service life are weather

conditions and mechanical and chemical stresses.

## LCA: Calculation rules

### Declared Unit

The product declared is a two-component reaction resin mortar manufactured by EJOT SE & Co. KG with the product name EJOT Multifix PSF+ / Sormat ITH-Pe. The declared unit is based on 1 kg reaction resin product in the ratio at which the two components must be mixed before use.

The mixing ratio between the resin component and the curing agent component is 9:1 [m/m] (volume ratio 10:1). The packaging is also included in the calculation at 0.3013 kg per 1 kg of reaction resin product. The declared unit data are presented in the table below.

### Declared unit data

Name	Value	Unit
Declared unit	1	kg

### System boundary

Type of EPD: Cradle to factory gate with options. The following information modules are defined as system boundaries in this study:

Production stage (A1-A3):

- A1, Raw material extraction,
- A2, Transport to the manufacturer,
- A3, Manufacturing.

End of life (C1-C4):

- C1, Deconstruction/demolition
- C2, Transport,
- C3, Waste processing,
- C4, Disposal.

Reuse, recovery and recycling potential (D)

To precisely determine the indicators and environmental impacts of the declared unit, a total of 8 information modules are considered. The information modules A1 to A3 describe the material provision, the transport to the production site, as well

as the production processes of the product itself.

The precursor products are sourced from Germany, Belgium, Italy and France. Transport is mainly done by truck. The following process diagrams illustrate the underlying production process.

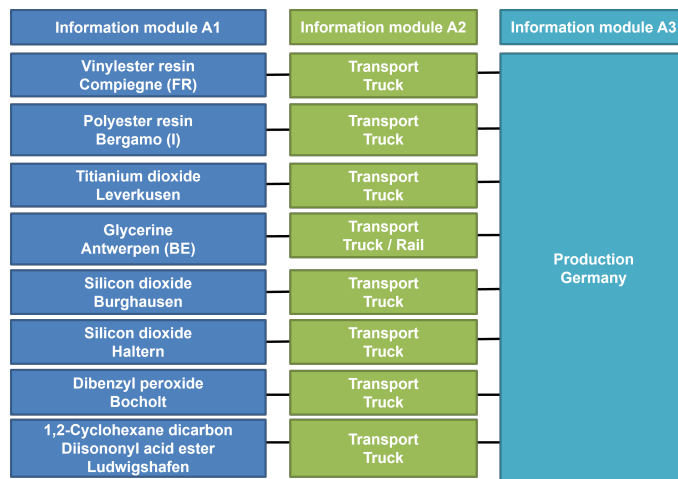


Figure 1 Information modules A1 to A3 of the product




Figure 2 Information modules A1 to A3 of the packaging

### Geographic Representativeness

Land or region, in which the declared product system is manufactured, used or handled at the end of the product's lifespan: Germany

### Comparability

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to *EN 15804* and the building context, respectively the product-specific characteristics of performance, are taken into account. The background databases from the LCA for Experts databases, which this study also draws on, are documented at the following site (Sphera). 2023.1 <http://www.gabi-software.com/deutsch/index/>

## LCA: Scenarios and additional technical information

### Characteristic product properties of biogenic carbon

No renewable raw materials are used in the product or the packaging. The biogenic carbon value is therefore reported as zero.

### Packaging per declared unit

Name	Value	Unit
Packaging PP	0.0318	kg
Packaging PA6	0.2696	kg

## End of Life (C1-C4)

The product is demolished by using an electric chisel. The electrical energy consumption for this tool is estimated at 0.05 MJ for the declared unit. The power consumption is calculated using a European energy mix. Construction waste is transported 200 km by truck to a waste treatment facility. At the waste treatment facility, the construction waste is shredded and then disposed in a landfill.

Name	Value	Unit
Collected as mixed construction waste	1	kg
Shredding	1	kg
Disposal in landfill	1	kg

## Reuse, recovery and recycling potential (D), relevant scenario specifications

The product has no reuse, recovery or recycling potential. Information module D is therefore declared and reported as zero.

Name	Value	Unit
Reuse, recovery and recycling potential	0	kg

## LCA: Results

DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; MND = MODULE OR INDICATOR NOT DECLARED; MNR = MODULE NOT RELEVANT)

Product stage			Construction process stage		Use stage							End of life stage				Benefits and loads beyond the system boundaries
Raw material supply	Transport	Manufacturing	Transport from the gate to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	MND	MND	MND	MND	MNR	MNR	MNR	MND	MND	X	X	X	X	X

RESULTS OF THE LCA - ENVIRONMENTAL IMPACT according to EN 15804+A2: 1 kg EJOT Multifix PSF+ / Sormat ITH-Pe

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
Global Warming Potential total (GWP-total)	kg CO <sub>2</sub> eq	3.45E+00	4.58E-03	1.75E-02	2.58E-03	1.46E-02	0
Global Warming Potential fossil fuels (GWP-fossil)	kg CO <sub>2</sub> eq	3.38E+00	4.53E-03	1.73E-02	2.56E-03	1.46E-02	0
Global Warming Potential biogenic (GWP-biogenic)	kg CO <sub>2</sub> eq	7.32E-02	4.91E-05	0	0	0	0
Global Warming Potential luluc (GWP-luluc)	kg CO <sub>2</sub> eq	6.39E-04	4.87E-07	1.58E-04	1.92E-05	4.53E-05	0
Depletion potential of the stratospheric ozone layer (ODP)	kg CFC11 eq	6.23E-09	8.27E-14	1.49E-15	4.28E-15	3.71E-14	0
Acidification potential of land and water (AP)	mol H <sup>+</sup> eq	5.38E-03	9.57E-06	6.48E-05	1.34E-05	1.03E-04	0
Eutrophication potential aquatic freshwater (EP-freshwater)	kg P eq	1.63E-05	1.67E-08	6.21E-08	8.71E-09	2.93E-08	0
Eutrophication potential aquatic marine (EP-marine)	kg N eq	1.73E-03	2.29E-06	3.03E-05	6.13E-06	2.67E-05	0
Eutrophication potential terrestrial (EP-terrestrial)	mol N eq	1.5E-02	2.39E-05	3.39E-04	6.77E-05	2.94E-04	0
Formation potential of tropospheric ozone photochemical oxidants (POCP)	kg NMVOC eq	5.46E-03	6.11E-06	5.84E-05	1.66E-05	8.06E-05	0
Abiotic depletion potential for non fossil resources (ADPE)	kg Sb eq	4.89E-07	6.95E-10	1.1E-09	2.74E-09	6.72E-10	0
Abiotic depletion potential for fossil resources (ADPF)	MJ	7.38E+01	9.43E-02	2.32E-01	5.04E-02	1.94E-01	0
Water use (WDP)	m <sup>3</sup> world eq deprived	1.1E-01	9.98E-04	1.96E-04	4.98E-04	1.6E-03	0

RESULTS OF THE LCA - INDICATORS TO DESCRIBE RESOURCE USE according to EN 15804+A2: 1 kg EJOT Multifix PSF+ / Sormat ITH-Pe

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
Renewable primary energy as energy carrier (PERE)	MJ	4.87E+00	5.64E-02	1.64E-02	4.68E-03	3.16E-02	0
Renewable primary energy resources as material utilization (PERM)	MJ	0	0	0	0	0	0
Total use of renewable primary energy resources (PERT)	MJ	4.87E+00	5.64E-02	1.64E-02	4.68E-03	3.16E-02	0
Non renewable primary energy as energy carrier (PENRE)	MJ	5.49E+01	9.43E-02	2.32E-01	5.05E-02	1.94E-01	0
Non renewable primary energy as material utilization (PENRM)	MJ	1.89E+01	0	0	0	0	0
Total use of non renewable primary energy resources (PENRT)	MJ	7.39E+01	9.43E-02	2.32E-01	5.05E-02	1.94E-01	0
Use of secondary material (SM)	kg	0	0	0	0	0	0
Use of renewable secondary fuels (RSF)	MJ	0	0	0	0	0	0
Use of non renewable secondary fuels (NRSF)	MJ	0	0	0	0	0	0
Use of net fresh water (FW)	m <sup>3</sup>	1.07E-02	4.55E-05	1.81E-05	1.44E-05	4.9E-05	0

RESULTS OF THE LCA – WASTE CATEGORIES AND OUTPUT FLOWS according to EN 15804+A2: 1 kg EJOT Multifix PSF+ / Sormat ITH-Pe

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
Hazardous waste disposed (HWD)	kg	6.55E-09	7.38E-12	8.59E-13	1.31E-13	4.23E-12	0
Non hazardous waste disposed (NHWD)	kg	3.26E-02	6.91E-05	3.35E-05	1.33E-05	9.71E-01	0
Radioactive waste disposed (RWD)	kg	1.11E-03	1.5E-05	3E-07	6.77E-07	2.21E-06	0
Components for re-use (CRU)	kg	0	0	0	0	0	0
Materials for recycling (MFR)	kg	0	0	0	0	0	0
Materials for energy recovery (MER)	kg	0	0	0	0	0	0
Exported electrical energy (EEE)	MJ	0	0	0	0	0	0
Exported thermal energy (EET)	MJ	0	0	0	0	0	0

RESULTS OF THE LCA – additional impact categories according to EN 15804+A2-optional: 1 kg EJOT Multifix PSF+ / Sormat ITH-Pe

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
Incidence of disease due to PM emissions (PM)	Disease incidence	ND	ND	ND	ND	ND	ND
Human exposure efficiency relative to U235 (IR)	kBq U235 eq	ND	ND	ND	ND	ND	ND
Comparative toxic unit for ecosystems (ETP-fw)	CTUe	ND	ND	ND	ND	ND	ND

Comparative toxic unit for humans (carcinogenic) (HTP-c)	CTUh	ND	ND	ND	ND	ND	ND
Comparative toxic unit for humans (noncarcinogenic) (HTP-nc)	CTUh	ND	ND	ND	ND	ND	ND
Soil quality index (SQP)	SQP	ND	ND	ND	ND	ND	ND

Disclaimer - applies to the following indicators: "Abiotic shortage potential - non-fossil resources", "Abiotic shortage potential - fossil fuels", "Water deprivation potential (users)", "Potential comparative toxic unit for ecosystems", "Potential comparative toxic unit for human health - carcinogenic effects", "Potential comparative toxic unit for human health - non-carcinogenic effects", "Potential soil quality index". The results of this environmental impact indicator shall be used with care, as the uncertainties of the results are high and as there is limited experience with the indicator.

## References

### Standards

#### DIN 51757

DIN 51757:2011-01

Testing of mineral oils and related materials - Determination of density.

#### EN 196

DIN EN 196-1:2016-11

Test methods for cement - Part 1: Determination of strength  
German version EN 196-1:2016

#### EN 12504

DIN EN 12504-4:2021-10

Testing concrete in structures - Part 4: Determination of ultrasonic pulse velocity.

#### EN 15804

EN 15804:2019-04+A2 (in print), Sustainability of construction works -  
Environmental Product Declarations - Core rules for the product category of construction products.

#### EN/TR 15941

CEN/TR 15941:2010-03, Sustainability of construction works -  
Environmental product declarations - Methodology for selection and use of generic data.

#### ISO 14025

DIN EN ISO 14025:2011-10, Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

#### ISO 14044

DIN EN ISO 14044:2006-10, Environmental management - Life cycle assessment - Requirements and guidelines.

### Further references

#### ecoinvent 3.9

Background database: ecoinvent 3.9.1

Zürich: ecoinvent (Ed.)

<http://www.ecoinvent.org>

(28.04.2023)

#### ETA-21/0664

European Technical Assessment.

#### ETA-22/0438

European Technical Assessment.

#### IBU 2021

Institut Bauen und Umwelt e.V.: General guidance for the EPD programme of the Institut Bauen und Umwelt e.V., Version 2.0, Berlin: Institut Bauen und Umwelt e.V., 2021.  
[www.ibu-epd.com](http://www.ibu-epd.com)

#### PCR PART A

Product Category Rules for Building-Related Products and Services - Calculation Rules for the Life Cycle Assessment and requirements on the Project Report V2.1, Institut Bauen und Umwelt e.V., 11.2021.

#### PCR: Reaction resin products

Guidance-Texts for Building-Related Products and Services. Part B: Requirements on the EPD for Reaction resin products, Version 1.3. Berlin: Institut Bauen und Umwelt e.V. (Hrsg.), 07.2014.

#### Sphera

LCA for Experts: 2023.1

Leinfelden-Echterdingen; Sphera

Solution GmbH (Hrsg.)

<http://www.gabi-software.com/deutsch/index/>

(28.04.2023)



## Publisher

Institut Bauen und Umwelt e.V.  
Hegelplatz 1  
10117 Berlin  
Germany

+49 (0)30 3087748- 0  
info@ibu-epd.com  
www.ibu-epd.com

---



## Programme holder

Institut Bauen und Umwelt e.V.  
Hegelplatz 1  
10117 Berlin  
Germany

+49 (0)30 3087748- 0  
info@ibu-epd.com  
www.ibu-epd.com

---



## Author of the Life Cycle Assessment

FIT-Umwelttechnik GmbH  
Westerstr. 13  
38442 Wolfsburg  
Germany

05362 72 69 474  
bertram@fit-umwelttechnik.de  
www.fit-umwelttechnik.com

---



## Owner of the Declaration

EJOT SE & Co. KG  
In der Stockwiese 35  
57334 Bad Laasphe  
Germany

+49 2752 9080  
construction@ejot.com  
www.ejot.de